


Precision Ball Screw Spline

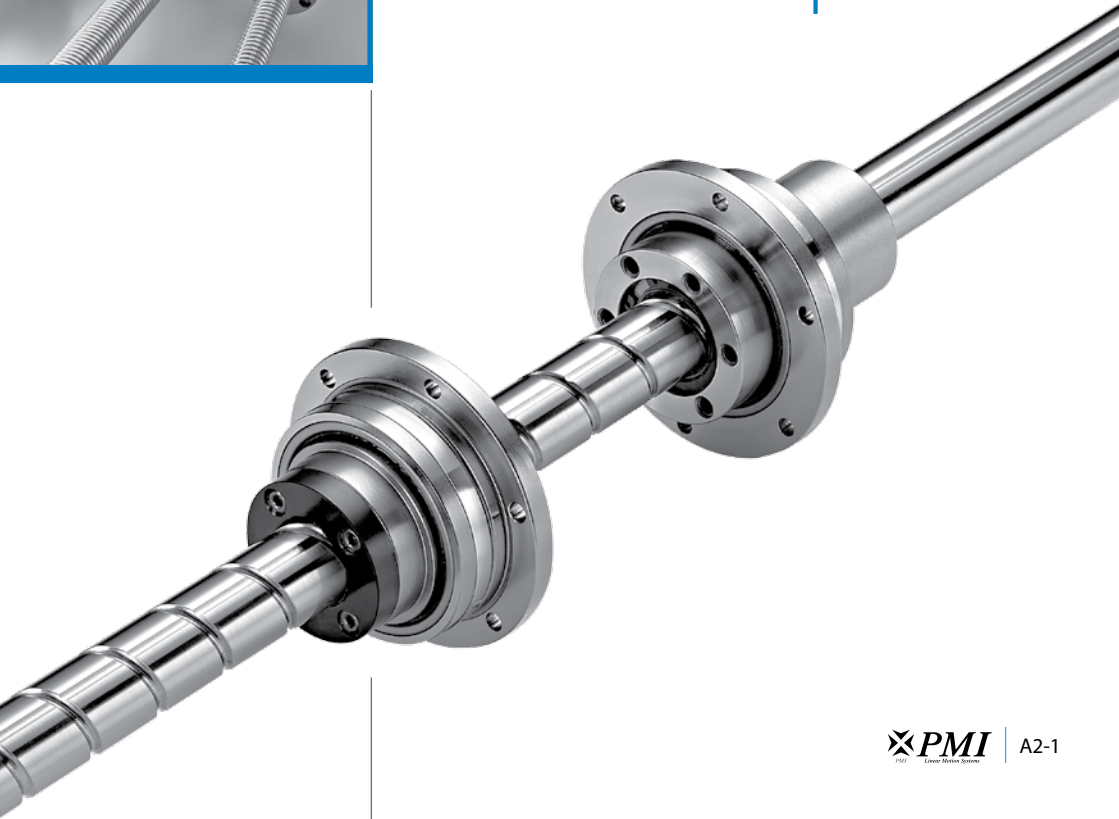

Precision Ball Screw Spline

Design Principle

The Precision Ball Screw Spline contains Ball Screw grooves and Ball Spline grooves that cross each other on a single shaft. The Precision Ball Screw Spline nut has a special designed support bearing directly set up on the outer ring of the nuts. The Precision Ball Screw Spline is capable of performing three modes of motion (rotational, linear and spiral) with a single shaft by rotating or stopping the spline nut.

Features

High Positioning Accuracy

The Ball Spline groove profile is designed Gothic arch. By applied preload, the backlash in the rotational direction is eliminated therefore having higher positioning accuracy.

Lightweight and Compact

Spline nut and the support bearing is integration structure. The Spline nut is designed lightweight. Therefore, the highly accurate and compact design is achieved.

Simple Installation

The balls recirculation in ball holder, prevent balls falling from the spline nut while assembling.

Support Bearing

The support bearing of the Ball Screw is designed a contact angle of 45° , thus it has higher axial rigidity, while Ball Spline has a contact angle of 45° , thus it has the average force of axial and radial direction.

Smooth Motion and Lower Noise

As the Ball Screw is adapting end cap recirculation structure, thus can be smooth motion with lower noise.




Fig.1 Model PBSA

Applications

SCARA robot, Assembly robot, Automatic loader, and Machining center's, ATC equipment.

Types and Features

Types of Precision Ball Screw Spline

Types of Precision Ball Screw Spline Model PBSA

Spline nut and the support bearing is integration structure.


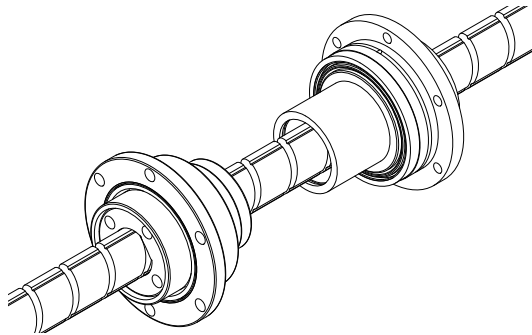


Fig.2 Types of Precision Ball Screw Spline Model PBSA

Product Explanation of Precision Ball Screw Spline

Nomenclature

PBSA-20-20-450-500-S-0.018

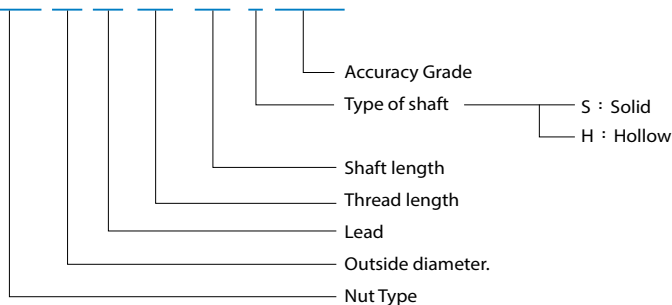

Accuracy Standards

The Precision Ball Screw Spline is manufactured with the following specifications.

- Ball Screw

Axial clearance : 0 or less

Lead angle accuracy : C5

(For detailed specifications, see **Table 2[A1-6]**, **Table 3[A1-7]**)

- Ball Spline

Clearance in the rotational direction : 0 or less (FC : light preload)

(For detail specifications, see Section **[B2-25]**)

Accuracy grade : Class H

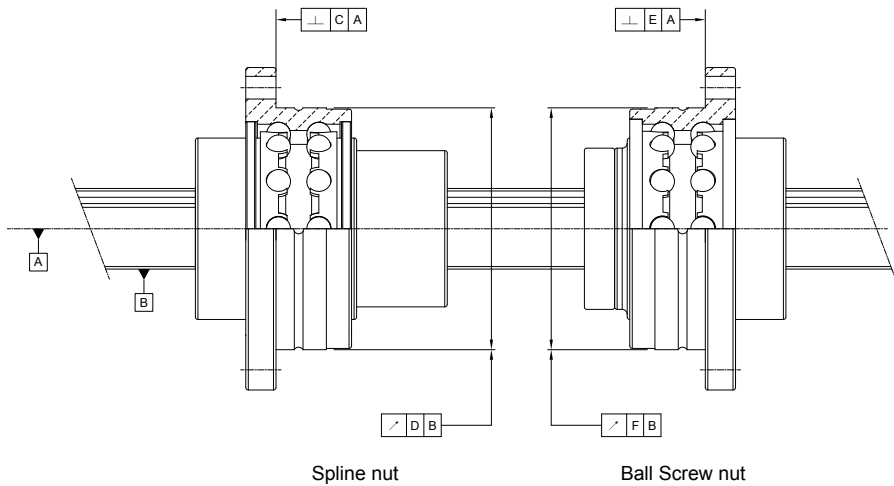


Fig.3 Model PBSA


Table 1 Accuracy Standards

Unit: *mm*

| Model No. | C | D | E | F |
|-----------|-------|-------|-------|-------|
| PBSA 1616 | 0.018 | 0.021 | 0.016 | 0.020 |
| PBSA 2020 | 0.018 | 0.021 | 0.016 | 0.020 |
| PBSA 2525 | 0.021 | 0.021 | 0.018 | 0.024 |

Action Patterns

Basic Actions



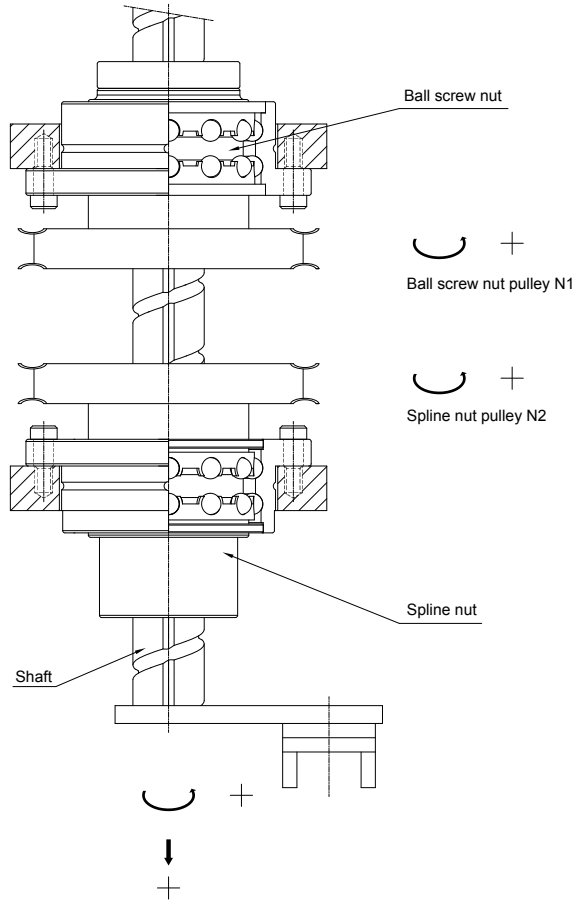


l Ball screw lead (mm)



N_2 Spline nut rotational speed (min^{-1})



N_1 Ball screw nut rotational speed (min^{-1})

V Feed rate (mm/min)


| Motion | Action direction | Input | | Shaft motion | |
|--|-----------------------------------|---------------------|-----------------------------|--|--|
| | | Ball screw pulley | Ball spline pulley | Vertical direction (speed) | Rotational direction (rotation speed) |
| Vertical  | ① Vertical direction → down | N_1 (Forward) | 0 | $V = N_1 \cdot l$ ($N_1 \neq 0$) | 0 |
| | Rotational direction → 0 | | | | |
| | ② Vertical direction → up | $-N_1$ (Reverse) | 0 | $V = -N_1 \cdot l$ ($N_1 \neq 0$) | 0 |
| | Rotational direction → 0 | | | | |
| Rotation  | ① Vertical direction → 0 | N_1 | N_2 (Forward) | 0 | N_2 (Forward) ($N_1 = N_2 \neq 0$) |
| | Rotational direction → forward | | | | |
| | ② Vertical direction → 0 | $-N_1$ | $-N_2$ (Reverse) | 0 | $-N_2$ (Reverse) ($-N_1 = -N_2 \neq 0$) |
| | Vertical direction → reverse | | | | |
| Spiral  | ① Vertical direction → up | 0 | N_2 ($N_2 \neq 0$) | $V = N_2 \cdot l$ | N_2 (Forward) |
| | Rotational direction → forward | | | | |
| | ② Vertical direction → down | 0 | $-N_2$ ($-N_2 \neq 0$) | $V = -N_2 \cdot l$ | $-N_2$ (Reverse) |
| | Rotational direction → reverse | | | | |

Extended Actions


| Motion | Action direction | Input | | Shaft motion | |
|--|----------------------------------|---------------------|---------------------|--|--|
| | | Ball screw pulley | Ball spline pulley | Vertical direction (speed) | Rotational direction (rotation speed) |
| Up → down → forward →Up → down → reverse  | ① Vertical direction → up | $-N_I$ (Reverse) | 0 | $V = -N_I \cdot l$ ($N_I \neq 0$) | 0 |
| | ② Vertical direction → down | N_I (Forward) | 0 | $V = N_I \cdot l$ ($N_I \neq 0$) | 0 |
| | ③ Rotational direction → forward | N_I | N_2 (Forward) | 0 | N_2 (Forward) ($N_I = N_2 \neq 0$) |
| | ④ Vertical direction → up | $-N_I$ | 0 | $V = -N_I \cdot l$ ($N_I \neq 0$) | 0 |
| | ⑤ Vertical direction → down | N_I | 0 | $V = N_I \cdot l$ ($N_I \neq 0$) | 0 |
| | ⑥ Rotational direction → reverse | $-N_I$ | $-N_2$ (Reverse) | 0 | $-N_2$ (Reverse) ($-N_I = -N_2 \neq 0$) |
| down → Up → forward →down → Up → reverse  | ① Vertical direction → down | N_I | 0 | $V = N_I \cdot l$ ($N_I \neq 0$) | 0 |
| | ② Vertical direction → up | $-N_I$ | 0 | $V = -N_I \cdot l$ ($N_I \neq 0$) | 0 |
| | ③ Rotational direction → forward | N_I | N_2 | 0 | N_2 ($N_I = N_2 \neq 0$) |
| | ④ Vertical direction → down | N_I | 0 | $V = N_I \cdot l$ ($N_I \neq 0$) | 0 |
| | ⑤ Vertical direction → up | $-N_I$ | 0 | $V = -N_I \cdot l$ ($N_I \neq 0$) | 0 |
| | ⑥ Rotational direction → down | $-N_I$ | $-N_2$ | 0 | $-N_2$ ($-N_I = -N_2 \neq 0$) |

| Motion | Action direction | Input | | Shaft motion | | |
|--|------------------|-----------------------------------|--------------------|----------------------------|---------------------------------------|------------------------------------|
| | | Ball screw pulley | Ball spline pulley | Vertical direction (speed) | Rotational direction (rotation speed) | |
| Down → forward → up → reverse  | ① | Vertical direction → down | N_1 | 0 | $V=N_1 \cdot l$ ($N_1 \neq 0$) | 0 |
| | ② | Rotational direction → forward | N_1 | N_2 | 0 | N_2 ($N_1 = N_2 \neq 0$) |
| | ③ | Vertical direction → up | $-N_1$ | 0 | $V=-N_1 \cdot l$ ($N_1 \neq 0$) | 0 |
| | ④ | Rotational direction → reverse | $-N_1$ | $-N_2$ | 0 | $-N_2$ ($-N_1 = -N_2 \neq 0$) |
| Down → up → reverse → forward  | ① | Vertical direction → down | N_1 | 0 | $V=N_1 \cdot l$ ($N_1 \neq 0$) | 0 |
| | ② | Vertical direction → up | $-N_1$ | 0 | $V=-N_1 \cdot l$ ($N_1 \neq 0$) | 0 |
| | ③ | Rotational direction → reverse | $-N_1$ | $-N_2$ | 0 | $-N_2$ ($-N_1 = -N_2 \neq 0$) |
| | ④ | Rotational direction → forward | N_1 | N_2 | 0 | N_2 ($N_1 = N_2 \neq 0$) |

Example of Assembly

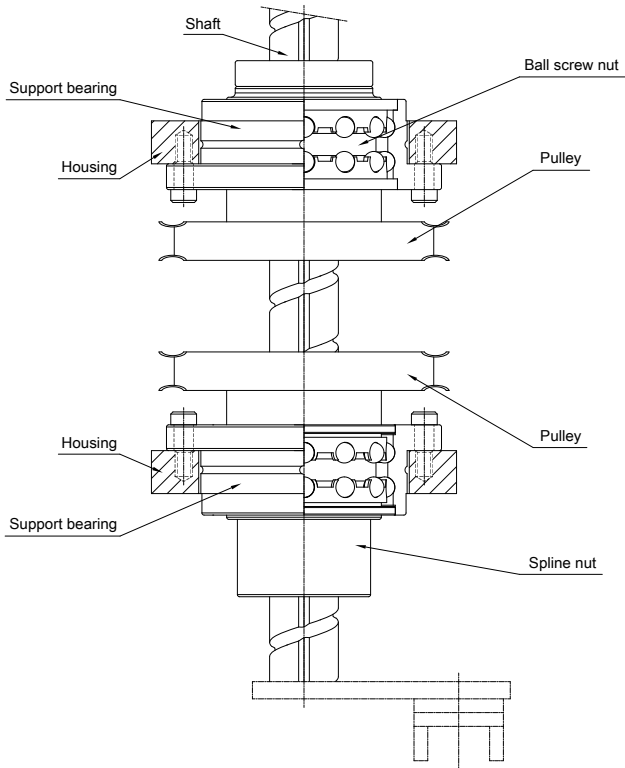

Example of installing the ball screw nut input pulley and the spline nut input pulley inside the housing and the maximum stroke can be achieved.




Ball Spline

| Shaft diameter | Inner diameter | Basic load rating | | Basic torque rating | | Static permissible moment M_A (N · m) | Nut diameter | | L | X | W1 |
|----------------|----------------|-------------------|---------|---------------------|------------------|---|-----------------|----|----|-----|----|
| | | Ca (kN) | Co (kN) | C_T (N · m) | C_{OT} (N · m) | | D _{h7} | D2 | | | |
| 16 | 11 | 6.9 | 12.4 | 31.4 | 34.3 | 60 | 36 | 31 | 50 | 4.5 | 56 |
| 20 | 14 | 10.1 | 17.8 | 56.8 | 55.8 | 120 | 43.5 | 35 | 63 | 4.5 | 64 |
| 25 | 18 | 15.2 | 25.3 | 105 | 103 | 180 | 52 | 42 | 71 | 5.5 | 75 |

Ball Screw

| Screw size | | | Effective turns Circuit×Row | Basic load rating | | Nut diameter | L2 | X1 | W2 | A1 | D4 _{g6} | D5 |
|------------|----------------|------|--------------------------------|-------------------|---------|------------------|----|-----|----|----|------------------|----|
| O.D. | Inner diameter | Lead | | Ca (kN) | Co (kN) | D3 _{h7} | | | | | | |
| 16 | 11 | 16 | 1.8×1 | 3.8 | 6.8 | 36 | 40 | 4.5 | 56 | 64 | 48 | 32 |
| 20 | 14 | 20 | 1.8×1 | 5.9 | 12.2 | 43.5 | 49 | 4.5 | 64 | 72 | 56 | 39 |
| 25 | 18 | 25 | 1.8×1 | 8.9 | 19.1 | 52 | 55 | 5.5 | 75 | 86 | 66 | 47 |

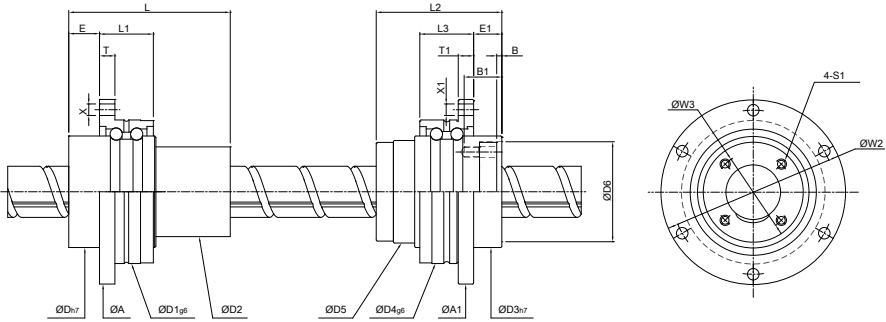

| A | D1 _{g6} | T | L1 | W | S×t | E | Support bearing basic load rating | | Mass | |
|----|------------------|---|----|----|-----------|----|-----------------------------------|---------|----------|--------------|
| | | | | | | | Ca (kN) | Co (kN) | Nut (kg) | Shaft (kg/m) |
| 64 | 48 | 6 | 21 | 30 | M4×0.7P×6 | 10 | 6.74 | 6.36 | 0.33 | 1.09 |
| 72 | 56 | 6 | 21 | 36 | M5×0.8P×8 | 12 | 7.49 | 8.16 | 0.48 | 1.76 |
| 86 | 66 | 7 | 25 | 44 | M5×0.8P×8 | 13 | 9.45 | 10.65 | 0.75 | 2.33 |

| D6 | T1 | L3 | W3 | S1 | B | B1 | E1 | Support bearing basic load rating | | Mass | |
|----|----|----|----|---------|-----|----|----|-----------------------------------|---------|----------|--------------|
| | | | | | | | | Ca (kN) | Co (kN) | Nut (kg) | Shaft (kg/m) |
| 32 | 6 | 21 | 25 | M4×0.7P | 2.5 | 13 | 10 | 6.74 | 6.36 | 0.31 | 1.09 |
| 39 | 6 | 21 | 31 | M5×0.8P | 2 | 13 | 11 | 7.49 | 8.16 | 0.48 | 1.76 |
| 47 | 7 | 25 | 38 | M6×1P | 3 | 17 | 13 | 9.45 | 10.65 | 0.66 | 2.33 |